


ACCESSORIES


9.1.6 Technical data and drawing

9.1.6.1 Dimensioned drawing

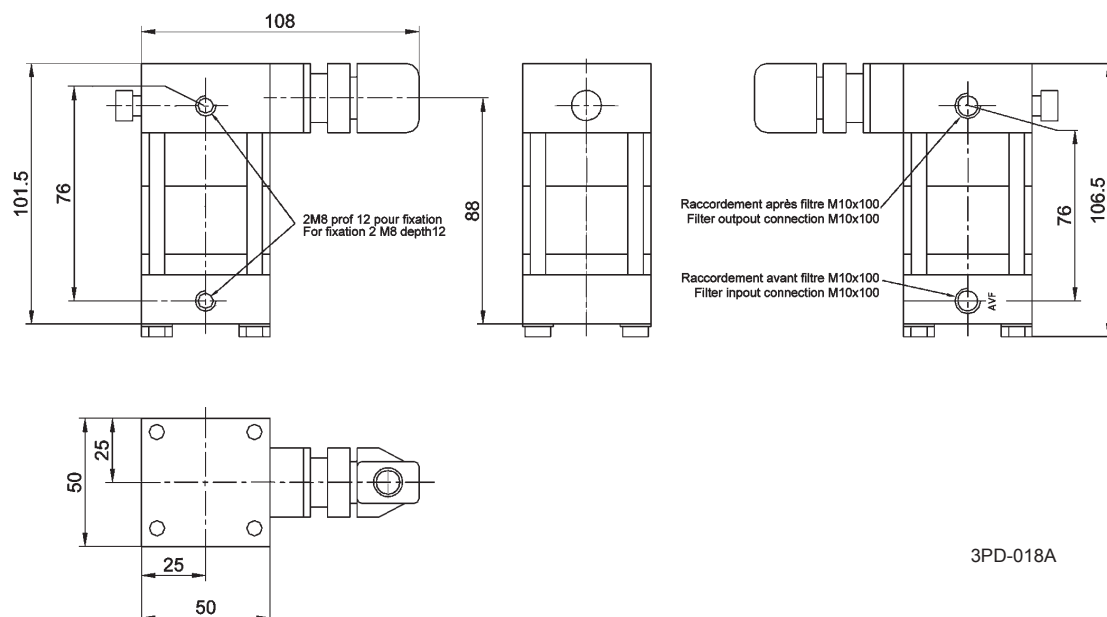

3PD-018A

9.1.6.2 Technical data & specifications

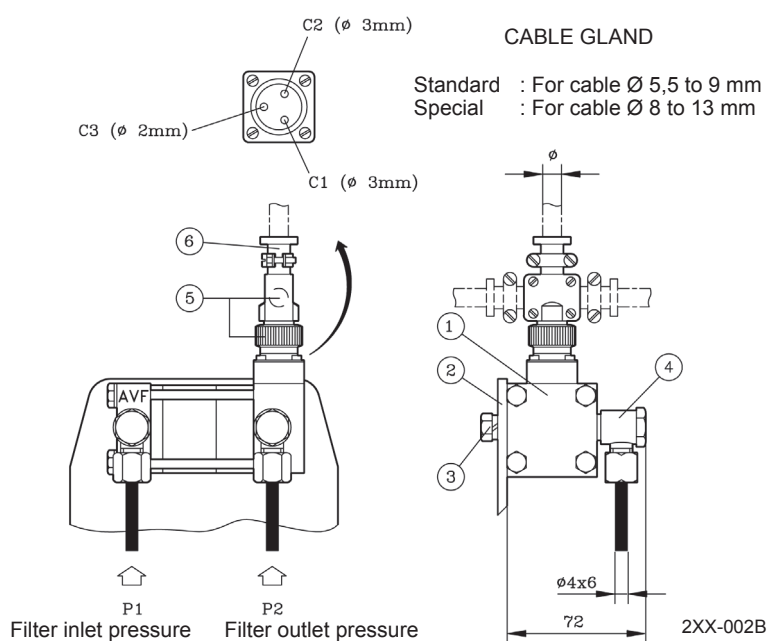

ELECTRICAL DATA

Breaking capacity 10 W
 Max. working voltage 250 V
 Min. break down voltage 1000 V
 Max. current Rating 0,5 A
 Contact quantity 3
 Normally closed C1+C3
 Normally open C2+C3
 Commun C3
 Cross sectionnal area of the wires :
 1,34 sq. mm for ø2 mm contacts
 3,39 sq. mm for ø3 mm contacts

RATING

Max. pressure 50 bar
 Max. temperature 160° C

Item	Article No	Name	Material	Qty
1	1800-08986 1800-08975	Pressure drop indicator { (Alarm ΔP 0,8 bar) (Alarm ΔP 1 bar)	Brass	1
2	**	Support	**	1
3	1800-06171 1800-06421	Washer Screw	Steel	2
4	1800-06800	Swivelling coupling	Steel	2
5	1800-08979	Electrical connector	-	1
6	1800-06275 1800-06276	Cable gland Standard Cable gland Special	Steel	1

** according to filter model