

FINAL DRAWINGS

SHIP No. 5 5 0

DRAWINGS OF COOKING APPARATUS



MITSUBOSHI CHUKI
MANUFACTURING CO. , LTD.
4-5-14, KAWADA, HIGASHIOSAKA, JAPAN

〒578-0905

大阪府東大阪市川田4丁目5-14


TEL 072 (964) 8800 (代表)

FAX 072 (964) 8371

DATE ' 03.7.10	CHECKED BY	DRAWN BY S.S	TYPE ER-30	DR No.	SCALE
-------------------	------------	-----------------	---------------	--------	-------

CONNECTION DIAGRAM OF ELECTRIC COOKING RANGE

ELECTRIC COOKING RANGE

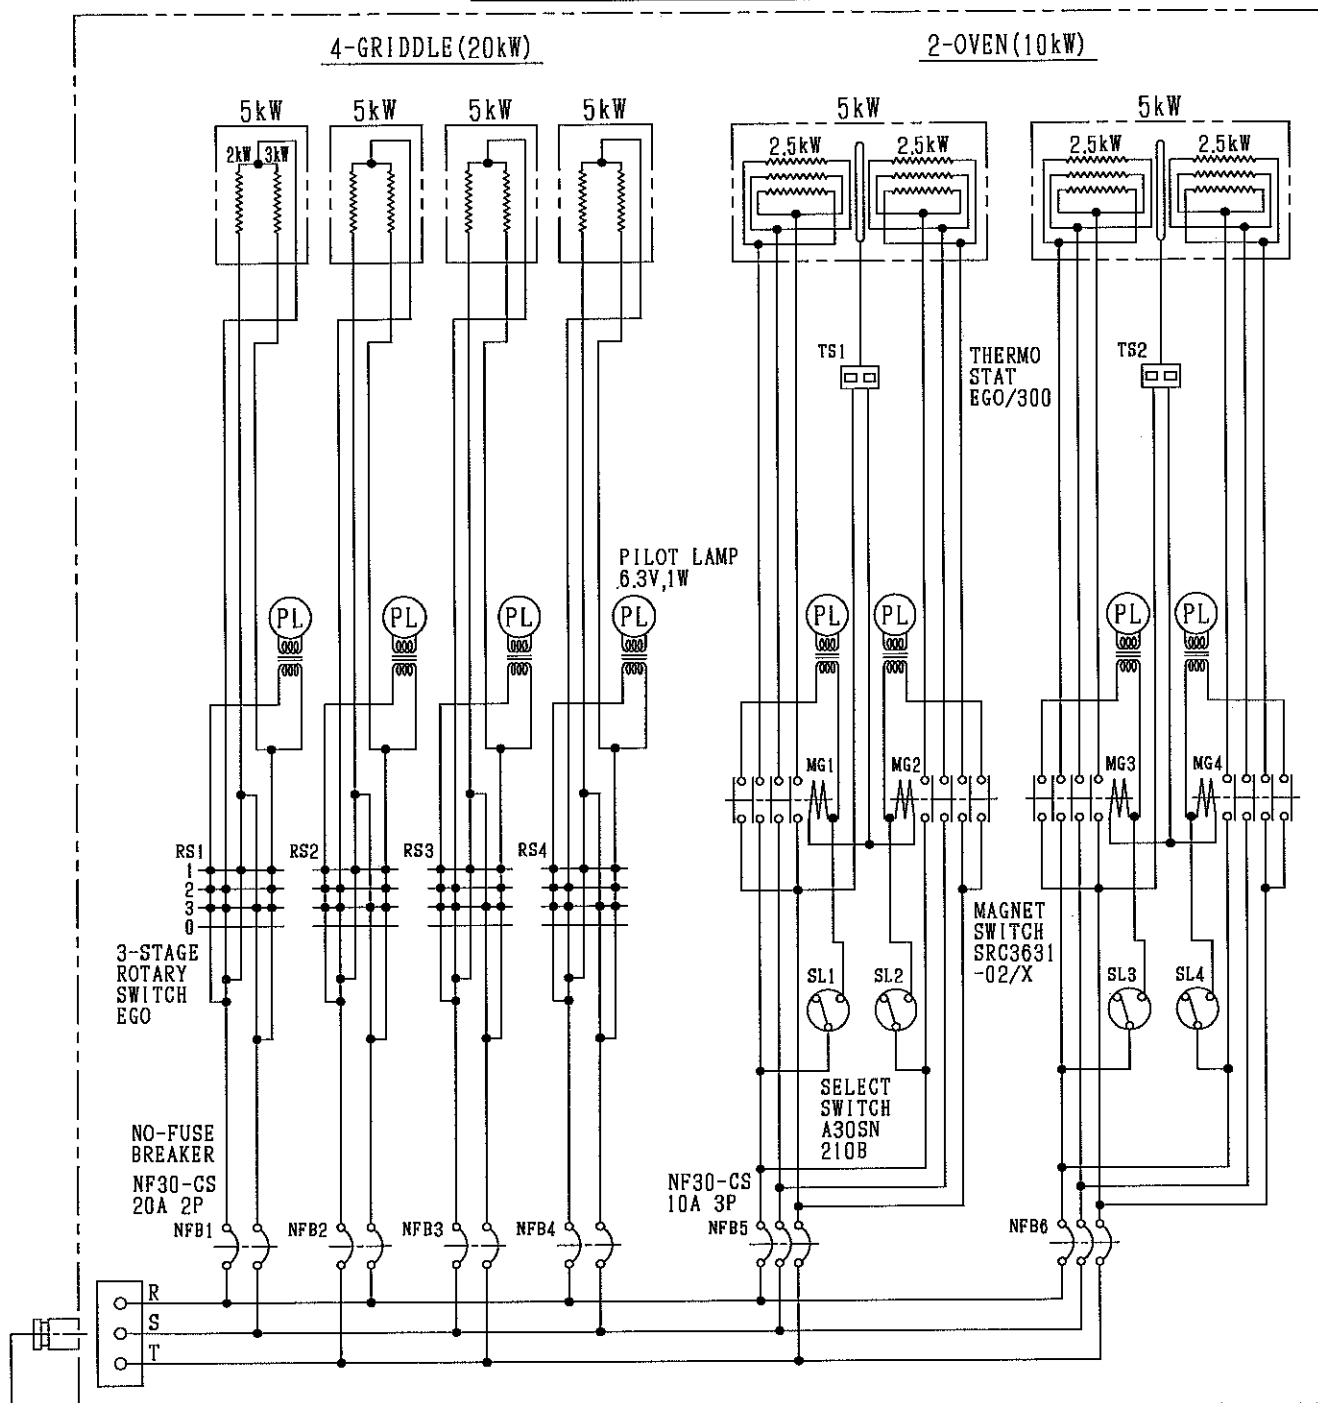

ELECTRIC CAPACITY

GLAND 30a CABLE
AC440V, 3Ø, 60Hz, 30kW, 44A

NAME OF PARTS	TOTAL CAP	EACH CAP	HIGH	MED	LOW
4-GRIDDLE	20kW	5kW	5kW	3kW	1.2kW
2-OVEN	10kW	5kW	5kW	—	—

Specification of
Electric Cooking Range
(ER-30)

Data;

Overall Dimensions (mm);
1900 (width) × 950 (depth) × 850 (high)
Oven Dimensions (mm);
550 (width) × 700 (depth) × 330 (high)
Griddle (Hot plate) Surface (mm);
300 × 600

Rating;

AC 440 V , 3 ϕ , 60 Hz

Connected load;

Griddle	;	5 kW × 4 = 20 kW
Oven	;	5 kW × 2 = 10 kW
		Total 30 kW

Heating characteristics

Oven;

Maximum watts to maintain oven at 200°C
(Room temperature 24°C) 1 kW
(When empty and closed)

Approx time to reach a temperature of 250°C
(Room temperature 24°C) 40 minutes
(When empty and closed and on high heat)

Griddle;

Approx time to reach a plate temperature of 250°C
(Room temperature 24°C) 30 minutes
(When on high heat)

Wattage of each griddle

Wattage high		5 kW
Wattage medium		3 kW
Wattage low		1.2 kW